



**Typical FD30 Glazing System**

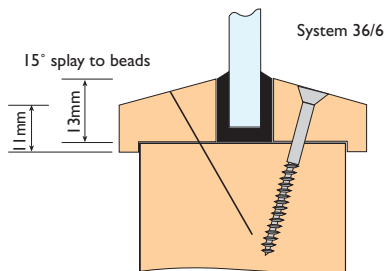

- SUITABLE GLASSES: Pyroshield Safety, Pyran S, Pyrobellite, (Firelite using System 36/5)
- MAXIMUM SIZE: Only restricted by certifiable aperture size
- TIMBER FOR BEADS: Min. density 500kg/m<sup>3</sup> (including softwood)
- BEAD FIXING: 38mm pins at 30 deg. or 50mm screws at 15 deg. 50mm from corners and at 200mm centres Minimum 2 No. fixings per bead
- SHAPES: Suitable for all shapes including circular and curved

**Typical FD60 Glazing System**

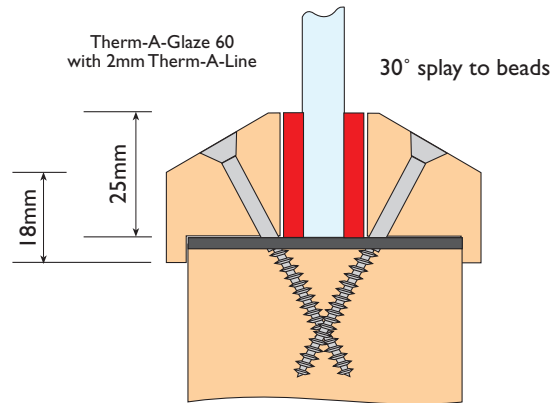

- SUITABLE GLASSES: Pyroshield Safety, Pyran S, Firelite
- MAXIMUM SIZE: Only restricted by certifiable aperture size
- TIMBER FOR BEADS: Min. density 640kg/m<sup>3</sup>
- BEAD FIXING: 55mm screws angled at 30 deg. 50mm from corners and at 200mm centres Minimum 2 No. fixings per bead
- SHAPES: Not suitable for circular or curved